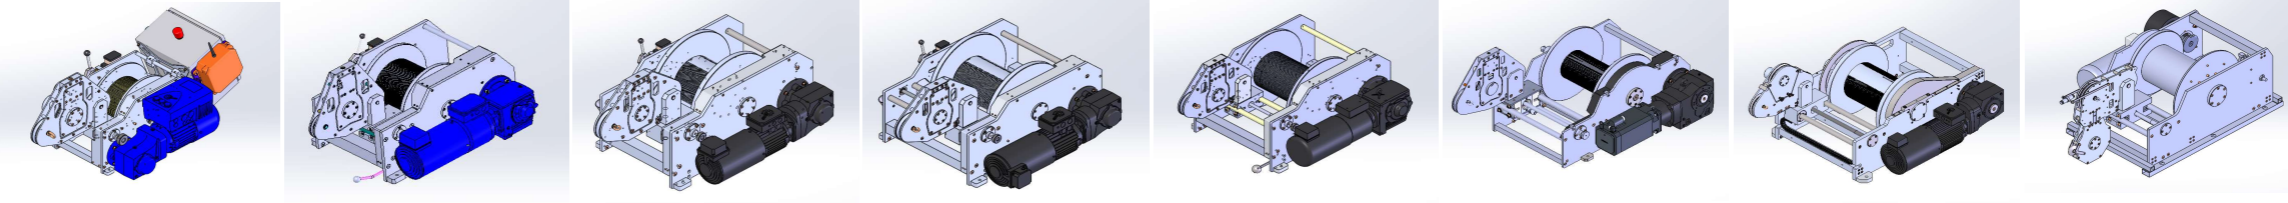


Winch Model*	Cable 300m	Cable 600m	Cable 1500m	Cable 2000m	Cable 2000m-2	Cable 4000m	Cable 3000m	Cable 6000m
<b>Cable/Wire Diameter**</b>	1/8"	3/16"	3/16"	3/16"	7/32"	3/16"	5/16"	0,072" - 0,092"
<b>Number of Conductors</b>	1	4	4	4	4	4	7	--
<b>Collector Rings</b>	6	6	6	6	6	6	12	--
<b>Tension**</b>	50 daN	200 daN	250 daN	270 daN	550 daN	650 daN	1500 daN	800 daN
<b>Speed**</b>	0.5 - 20 m/min	1 - 40 m/min	1 - 60 m/min	1 - 80 m/min	1 - 80 m/min	1 - 80 m/min	1 - 60 m/min	1 - 300 m/min
<b>Driving Power**</b>	0.37 kW	1.1 kW	1.5 kW	2.2 kW	4.0 kW	7.5 kW	11.0 kW	15.0 kW
<b>Weight***</b>	70 kg	200 kg	250 kg	330 kg	370 kg	550 kg	850 kg	1000 kg
<b>Dimensions** (LxWxH) [mm]</b>	530 x 500 x 390	930 x 760 x 630	990 x 770 x 680	910 x 900 x 680	1050 x 1000 x 750	1170 x 1100 x 800	1865 x 1170 x 980	1595 x 1660 x 960
<b>Drive</b>	electric	electric	electric	electric	electric	electric	electric	electric
<b>Material****</b>	Aluminium / Stainless Steel	Aluminium / Stainless Steel	Aluminium / Stainless Steel	Aluminium / Stainless Steel	Aluminium / Stainless Steel	Aluminium / Stainless Steel	Aluminium / Stainless Steel	Aluminium / Stainless Steel
<b>Automatic Spooling</b>	yes	yes <sup>1</sup>	yes <sup>1</sup>	yes <sup>1</sup>	yes <sup>1</sup>	yes <sup>1</sup>	yes <sup>1</sup>	yes <sup>1</sup>
<b>Tension Measurement</b>	no	yes	yes	yes	yes	yes	yes	yes
<b>Depth Encoder</b>	yes	yes	yes	yes	yes	yes	yes	yes
<b>Remote Control</b>	yes <sup>2</sup>	yes <sup>2</sup>	yes <sup>2</sup>	yes <sup>2</sup>	yes <sup>2</sup>	yes <sup>2</sup>	yes <sup>2</sup>	yes <sup>2</sup>
<b>Control Panel</b>	no	yes	yes	yes	yes	yes	yes	yes
<b>Fixing Brake</b>	yes	yes	yes	yes	yes	yes	yes	yes
<b>Manual Drum Move</b>	yes	yes	yes	yes	yes	yes	yes	yes
<b>Maximum Cable Length</b>	320 m	640 m	1800 m	2200 m	2200 m	4200 m	3100 m	6200 m
<b>Picture</b>								

\* More combinations/layouts available on Request

\*\* Base model only. Exact Figures dependent on specific customer model

\*\*\* w/o Cable/Wire

\*\*\*\* Complete Stainless Steel construction and IP 65 rated control box models available on request

**Additional Options:**

<sup>1</sup> Cable/Wire Cleaning Assembly

<sup>2</sup> Wireless Remote Control available separately

LogIn Bohrlochmessgeräte GmbH

Straße B 2, Industriepark

39245 Gommern

Germany

Phone: +49 (0) 39200 729 24

Email: [info@logingmbh.de](mailto:info@logingmbh.de)

Web: [www.logingmbh.de/](http://www.logingmbh.de/)